

TUBULAR TYPE LEVEL GAUGE


NL SERIES – With Protection Support Rod SL SERIES – With Protection Support Pipe

The tubular glass type is a simplest liquid level gauge for using in the pressure rating of 10 kg/cm² or under. The center to center length are over 1.5 meter. The intermediary joint ring would be used. Gauge glsas are made heat resistant borosilicate.

Technical Data


- Suitable Fluid:** Water, Oil, other chemical liquid
- Gauge Valve Material:** SS304, SS316, others available
- Gauge Tube Material:** Glass, P.V.C
- Seal Material:** Viton, Teflon available
- Gauge Valve Function:** With or Without ball check
- Max. Working Temperature:** 100°C
- Max. Working Pressure:** 4~7 kg/cm²
- Process Connection:** ½"~1½" Thread and Flange on request.
- Flange Rating:** JIS, ANSI, DIN available
- Drain Valve Connection:** standard ½"NPT(F); option available

Dimensions for NL Series

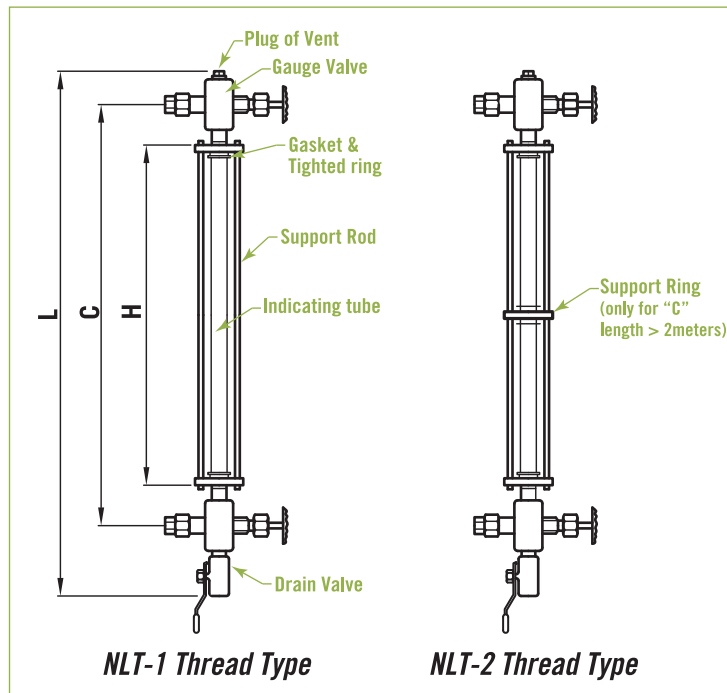

NLT-1 Thread Type

NLT-2 Thread Type

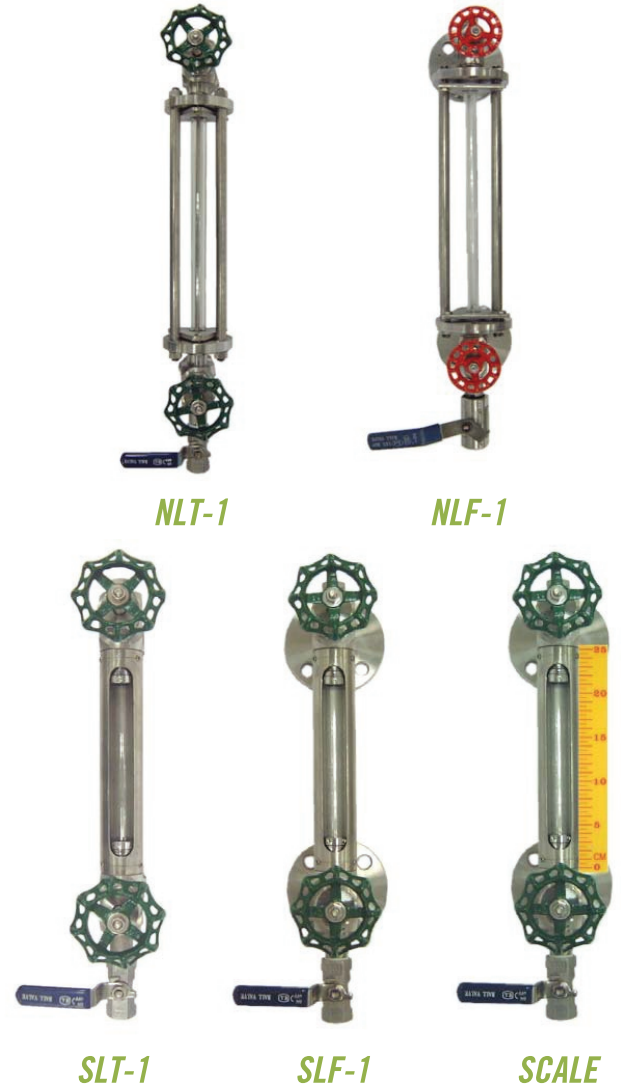


NLT-1

NLF-1

SLT-1

SLF-1

SCALE

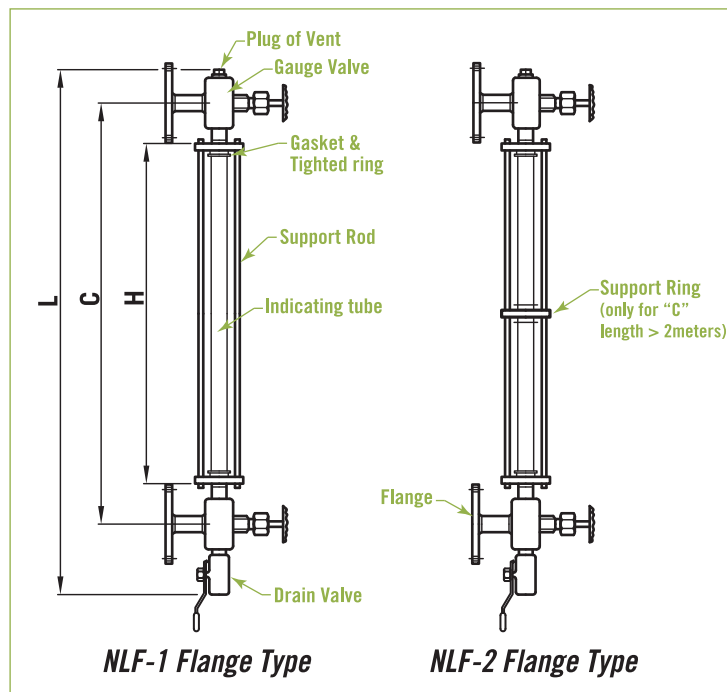

NLF-1 Flange Type

NLF-2 Flange Type

mm Item	L	C	H	Section
1	400	300	200	1
2	600	500	400	1
3	900	800	700	1
4	1200	1100	1000	1
5	1300	1200	1100	1
6	1600	1500	1400	2
7	1900	1800	1700	2
8	2100	2000	1900	2

NOTE. The "C" dimension can be made by requirement of customer. Option available.

