FLOAT-OPERATED LEVEL

EDW601 – Weather Proof Type

EDX601 – Explosion Proof Type

The NEW-FLOW Displacer Level Switches are made to fit a wide range applications such as pump control, waste water level and deep open tank. They are designed for high corrosive resistance and long service life. 601-Series have multiple set points and are easy to install and low cost.



Technical Data

Wetted Parts Material: SS316, SS304 available
Housing Material: EDX- Aluminum alloy; EDW- SS316 or C.S with painting
The Suitable S.G.: ≥0.9
Enclosure Housing: EDW–Weather Proof: IP65;
EDX–Explosion Proof: Class I, Groups A,B,C,D; Class II, Groups E,F,G; NEMA 4X
Alarm Switch: One or Two setting points, form A N.O. type bistable reed switch
Max. Temperature: 200°C
Switch Number: Maximum Point 6
Distance Between Two Switch: 25 mm
Adjustable Length High and Low Level: 300 mm

Control

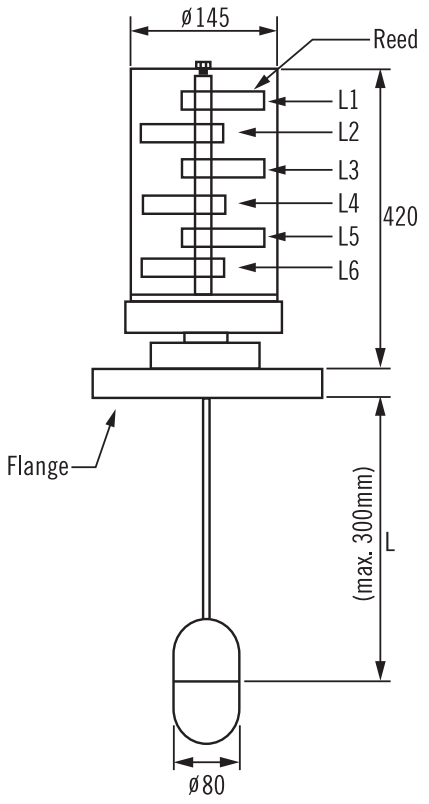

Ordering Information

EDW / EDX	Code	Housing Material					
		A	Aluminum alloy (only for EDX)	B	SS316	C	C.S with painting

Code	Process Connection Size
	(1) 3" (2) 4"

Code	Process Connection Rating
	(A) JIS 10K (B) JIS 20K (C) ANSI 150# (D) ANSI 300# (E) PN16 (F) PN40 (G) Option

Code	Conduit Size
1	¾"NPT

Code	Switch Function
1	One point SPST
2	Two point
3	Three point
4	Four point
5	Five point
6	Six point

Code	Float Material
	(1) SS316 (2) SS304

Code	Wetted Parts Material
	(A) SS316 (B) SS304

Code	Sp. Gr.
	(A) 1 (B) Other Sp. Gr.

Setting Point
Please fill in the requested length L1= L2= L3= L4= L5=

								L1= L2= L3= L4= L5=

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de