FLOW SIGHT GLASS GAUGE F SERIES

Flange Connection With Spring Paddle

The flow sight glass was designed with spring paddle for easy observastion of flowing fluid from any direction.

Technical Data

Service: – Compatible gas and liquid – Water treatment system
– Industrial flow system – Double window indication

Material: Body–SS316, SS304, SS316L; Paddle–SS316; Spring–SS316; Guge–Tempered glass; Gasket–Teflon, Gore Tex, Graphite

Max working temperature: 200°C (Option: 300°C available)

Max working pressure: FA type-10 kg/cm² at 25°C air
FB type-15 kg/cm² at 25°C air (Option: 30 kg/cm²)
(FA,FB upon pressure on request available)



FA TYPE CE 1128

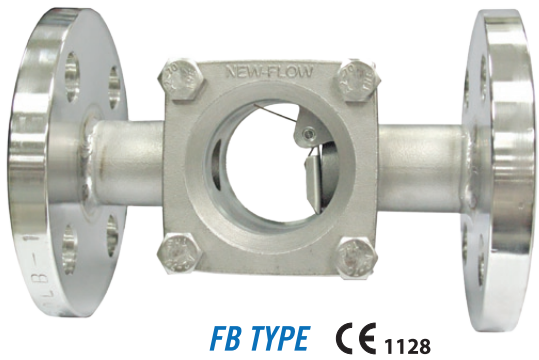

FB TYPE CE 1128

Dimension

FA Type

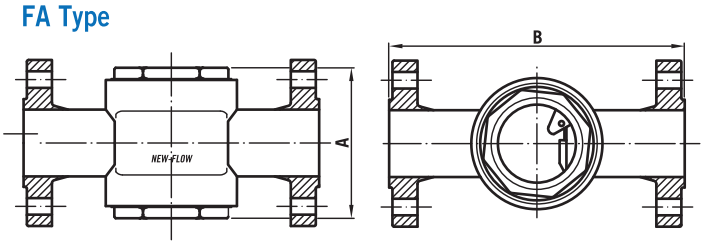

unit=mm

Size \ Range	15A	20A	25A	40A	50A
A	114	114	114	130	150
B	130	130	160	200	220
B (option)	140	140	140	180	220

FB Type

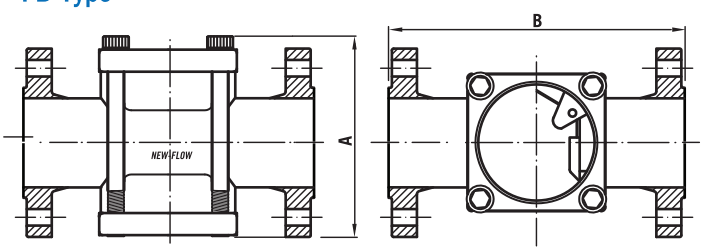

unit=mm

Size \ Range	15A	20A	25A	40A	50A	65A	80A	100A	125A	150A	200A
A	72	72	72	115	129	134	150	190	240	250	345
B	130	130	160	200	220	270	270	320	380	420	500
B (option)	140	140	140	180	220	260	260	310	–	–	–

Mounting Position

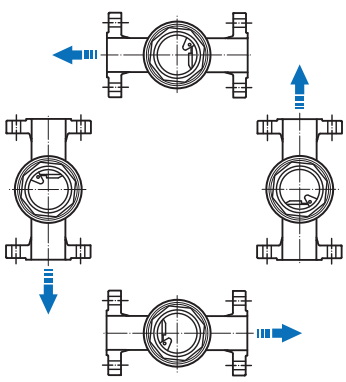

Ordering Information

FA/FB	Code	Wetted Parts Material
		(1) SS316 (2) SS304 (3) SS316L

Code	Size
1	15A
2	20A
3	25A
4	40A
5	50A
6	65A
7	80A
8	100A
9	125A
10	150A
11	200A

Code	Connection Rating
1	JIS 10K
2	JIS 20K
3	ANSI 150#
4	ANSI 300#
5	PN10
6	PN16
7	PN25
0	option

Code	Gasket Material
1	Teflon
2	Gore-Tex
3	Graphite

WWW.NEW-FLOW.DE | Tel: +49 3682 49099 | Fax: +49 3682 49093 | E-Mail: info@mess-regel.de